


Rated Voltage 6..24V DC +- %5  
 Current draw of control unit: 0,4A  
 Current draw of power unit: 0,1..6A  
 Installation: 35mm U-Channel  
 Safety classification: IP40 (Housing), IP20 (Terminals)  
 Receiver: EnOcean RCM110  
 Antenna: integrated  
 Range: Outdoors ca. 300m, Indoors <30m  
 Dimensions: 75x73,5x118,2mm  
 Housing: PC-Glass-Fibre filled, Cover black, Front colour yellow

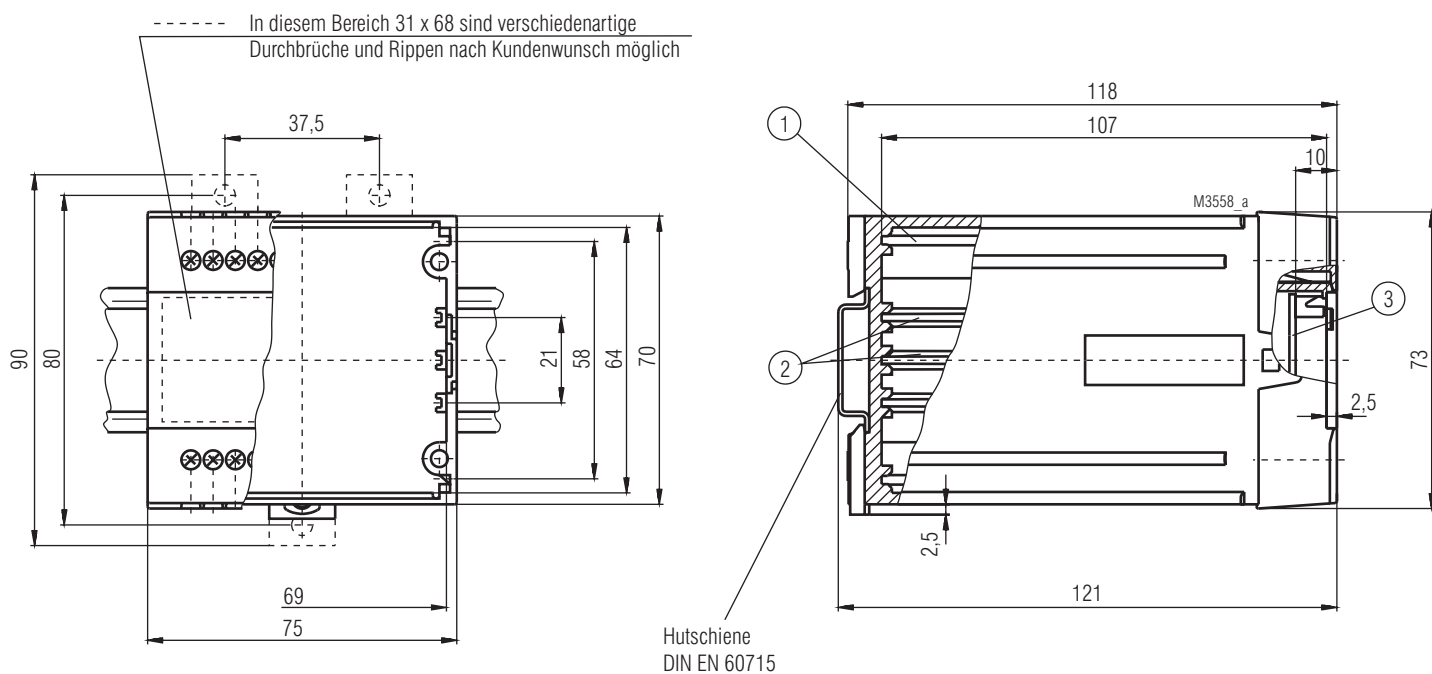

#### Max. Connector section:

1x 4,0mm<sup>2</sup> for single wire#  
 1x 2,5mm<sup>2</sup> for stranded wire & sleeve to DIN 46228-1/-2/-3/-4  
 2x 1,5mm<sup>2</sup> for stranded wire & sleeve to DIN 46228-1/-2/-3/-4

#### Connection scheme:

blank | W- | B- | G- | R- | W+ | B+ | G+ | R+ | GND | UB+